




PCT/GB 2003 / 0 0 5 6 3 1
PCT/PTO JUN 2005
10/540090
INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed *AmBennet*

Dated 19 January 2004

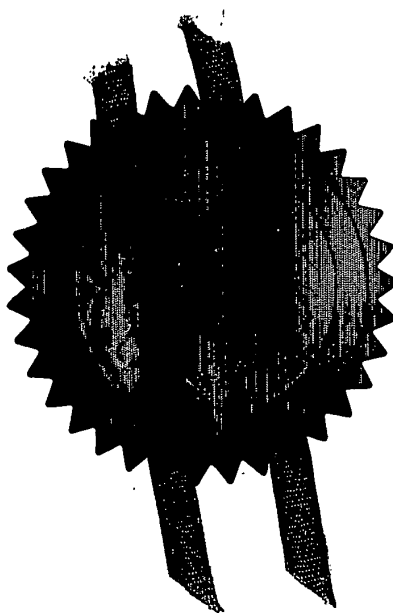

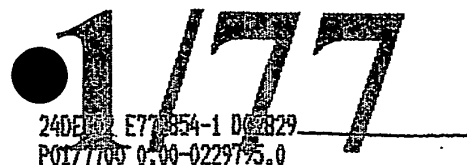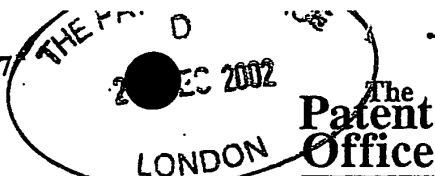

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

| | | | |
|--|--|--|-------------------------------------|
| 1. Your reference | J00044328GB | | |
| 2. Patent application number (The Patent Office will fill in this part) | 20 DEC 2002 | | 0229795.0 |
| 3. Full name, address and postcode of the or of each applicant (underline all surnames) | Royal Mail Group plc Royal Mail House 148 Old Street London EC1V 9HQ United Kingdom Patents ADP number (if you know it) If the applicant is a corporate body, give the country/state of its incorporation | | |
| | United Kingdom | 08532137 001 | |
| 4. Title of the invention | Improvements in monitoring systems | | |
| 5. Name of your agent (if you, have one) | RGC Jenkins & Co. | | |
| "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) | 26 Caxton Street London SW1H 0RJ United Kingdom Patents ADP number (if you know it) | | |
| | 03966736001 | ✓ | |
| 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications (and if you know it) the or each application number | Country | Priority application number (if you know it) | Date of filing (day / month / year) |
| 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application | Number of earlier application | | Date of filing (day / month / year) |
| 8. Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d)) | Yes | | |

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form 0

Description 4

Claim(s) 3

Abstract 0

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 20 December, 2002

R.G.C. JENKINS & CO

12. Name and daytime telephone number of person to contact in the United Kingdom

Timothy George Pendered 020-7931-7141

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay, please contact the Patent Office.

Improvements in monitoring systems

This invention relates to monitoring systems and in particular to a method and apparatus for measuring belt friction.

5

The invention provides a method of measuring the friction of a surface of a belt in a pulley and belt assembly, comprising the steps of applying a movable member to a surface of the belt, applying a thrust to the movable member in a sense to tend to move the movable member relative to the belt over its said surface, and obtaining a measure of the thrust needed to initiate slippage between the movable member and the belt, whereby to provide a measure of the friction of the said belt surface.

10

The invention also provides apparatus for measuring the friction of a surface of a belt in a pulley and belt assembly, comprising means for applying a movable member, eg a rotatable disc, to a surface of the belt, means for applying a thrust, eg a counter-torque, to the movable member in a sense to tend to move the movable member relative to the belt over its said surface, and means for obtaining a measure of the thrust needed to initiate slippage between the movable member and the belt, whereby to provide a measure of the friction of the said belt surface.

15

20

By way of example, embodiments of the invention will now be described with reference to the accompanying drawings, in which:

25

Figure 1 is a schematic illustration of apparatus according to the invention,

Figure 2 is a typical plot from simple operation of the apparatus of Figure 1, and

30

Figure 3 is a typical plot from a repeating operation of the Figure 1 apparatus.

In Figure 1, numeral 10 designates apparatus for measuring the coefficient of friction of the surface of a belt 11 in a pulley and belt assembly. The term "pulley and belt assembly" as used herein is intended to include any kind of assembly where an elongate flexible member ("belt") is driven around two or more rotatable members ("pulleys"), whether for the purpose of delivering rotational drive from one shaft to another or for the purpose of conveying items such as parcels or letters. However, the invention is particularly useful for letter conveying assemblies, also known as transport belts, which convey letters whilst they are orientated in a vertical plane and where belt friction is a vital factor in the conveyor's efficiency.

The apparatus 10 comprises a disc 12 which is rotatably mounted on a bracket 13. The outer rim of the disc 12 is designed to be in contact with the surface of the belt 11. For this purpose, the bracket 13 may conveniently be mounted on a frame or other suitable structure 14 on or adjacent to the machine in which the pulley and belt assembly is incorporated. The disc 12 is preferably arranged to contact the belt 11 at a point where it is trained over a pulley 15, so that the belt is nipped between the disc and pulley. The bracket 13 preferably incorporates an adjustable spring-loaded mechanism 16 to allow the nip pressure on the belt 11 between the disc 12 and pulley 15 to be set and remain at a constant chosen value.

The disc 12 will normally be driven to rotate through its contact with the moving belt 11, and the surface texture of the outer rim of the disc and the nip pressure are suitably chosen for this purpose. A measurable braking or restraining device, such as an electric motor 17, is coupled to the disc 12 in order to provide a counter-torque to oppose its rotation. The motor 17 is conveniently mounted on the bracket 13. A sensor 18 is arranged to detect rotational movement of the disc 12. Signals from the sensor 18 are transmitted to a data processing unit 19. The motor 17 is controlled by the data processing unit 19.

In dynamic use of the apparatus 10, with the belt 11 moving and driving the disc 12 to rotate, the motor 17 is used to apply a controlled counter-torque to the disc, ie in a sense opposing rotation of the disc. The counter-torque from the motor 17 is increased until it is just sufficient to stop the disc 12 rotating. This will be detected by the sensor 18 and this is the point at which the frictional force between the belt 11 and disc 12 is overcome. The value of the load on the motor 17 at this instant (at reference t_0 in Figure 2) can be used to give a measure of the static friction of the belt 11.

Once relative movement starts to occur between the belt 11 and disc 12, ie slippage, less counter-torque from the motor 17 will be required to stop the disc 12 rotating. This is the kinetic friction of the belt 11, which settles at a generally constant lower value, as is seen in the curve to the right-hand side of t_0 in the Figure 2 plot.

The data processing unit 19 is advantageously programmed to control the apparatus so that it operates on a continuous basis, somewhat akin to the principle used for anti-lock braking systems. This will now be described with reference to Figure 3.

At a given instant t_1 , if the signal from the sensor 18 indicates that the disc 12 is still being driven by the belt 11, the data processing unit 19 increases the load on the motor 17 and hence the counter-torque applied to the disc. Such an instant would for example be at point (a) in Figure 2. If, in another instant t_2 , the signal from the sensor 18 indicates that the disc 12 has momentarily been brought to rest, the data processing unit 19 immediately reduces the motor load and hence the counter-torque applied to the disc. Such an instant is represented as point (b) in Figure 3. Because the system will take a finite time to react, there will for a moment be a certain amount of slippage between the belt and the momentarily-stationary disc. This is represented by the

downwardly sloping curve (c) in Figure 3. As soon as the signal from the sensor indicates that the disc has once again begun to be driven to rotate by the belt, however, the data processing unit will once again increase the motor load to produce enough counter-torque to stop the disc. This is represented by the upwardly sloping section (d) of the plot in Figure 3. A point is again reached where the disc is brought momentarily to a standstill, indicated here as point (e) at instant t_3 . The system continues in this cyclical manner, continuously monitoring and giving a measure of belt friction.

- 10 The apparatus 10 will preferably be able to monitor belt friction at various different positions on the belt, say for example at the top, bottom and middle sections of the belt seen in Figure 1. For this purpose, a number of individual discs may be used. Alternatively, the apparatus 10 may be mounted so as to be movable relative to the belt, parallel to the axis of the pulley 15 seen
- 15 Figure 1, with a single disc thereby being capable of sampling belt friction at different locations across the width of the belt.

The apparatus could of course be used to measure the static friction of the surface of a belt when the belt is stationery.

20

It will be appreciated that whereas an electric motor has been used in the apparatus described above, other measurable braking or retraining means could equally well be used instead. Indeed, mechanisms other than the rotatable disc may be used as a means of measuring friction.

25

The apparatus 10 will preferably be capable of operating autonomously on a continuous basis and thereby provide a constant watch over the condition of the belt.

30

Claims:

1. A method of measuring the friction of a surface of a belt in a pulley and belt assembly, comprising the steps of applying a movable member to a surface of the belt, applying a thrust to the movable member in a sense to tend to move the movable member relative to the belt over its said surface, and obtaining a measure of the thrust needed to initiate slippage between the movable member and the belt, whereby to provide a measure of the friction of the said belt surface.
2. A method as claimed in claim 1 wherein said movable member is a rotatable member.
3. A method as claimed in claim 2 wherein the thrust that is applied to said rotatable member is in the form of a counter-torque.
4. A method as claimed in claim 2 or claim 3 and including the step of monitoring the rotational movement of the rotatable member.
5. A method as claimed in claim 4 and including the step of controlling the application of said counter-torque to the rotatable member in response to detection of its rotational movement.
6. A method as claimed in any preceding claim and including the step of measuring the friction of said surface of the belt at a number of different positions across its width.
7. A method as claimed in any preceding claim wherein measurement of the friction of said surface of the belt is undertaken whilst the belt is in motion.

8. A method as claimed in claim 7 wherein said measurement is undertaken repeatedly over time.

5 9. A method as claimed in any preceding claim wherein said movable member is applied to said surface of the belt with a substantially constant force.

10 10. Apparatus for measuring the friction of a surface of a belt in a pulley and belt assembly, comprising means for applying a movable member to a surface of the belt, means for applying a thrust to the movable member in a sense to tend to move the movable member relative to the belt over its said surface, and means for obtaining a measure of the thrust needed to initiate slippage between the movable member and the belt, whereby to provide a measure of the friction of the said belt surface.

15

11. Apparatus as claimed in claim 10 wherein said movable member is a rotatable member.

20 12. Apparatus as claimed in claim 11 wherein the thrust applied to said rotatable member is in the form of a counter-torque.

13. Apparatus as claimed in claim 11 or 12 and further comprising means for sensing rotational movement of the rotatable member.

25 14. Apparatus as claimed in claim 13 and further comprising means for controlling application of said counter-torque to the rotatable member in response to detection of its rotational movement.

30 15. Apparatus as claimed in any one of claims 10 to 14 and further comprising means for moving the movable member applying means so as to

enable measurement of the friction of said surface of the belt at different positions across its width.



5 16. Apparatus as claimed in any one of claims 10 to 15 and further comprising means for applying said movable member to said surface of the belt with a substantially constant force.


10 17. A method of measuring the friction of a surface of a belt substantially as herein described with reference to the accompanying drawings.

18. Apparatus for measuring the friction of a surface of a belt substantially as herein described with reference to the accompanying drawings.

15

1/2

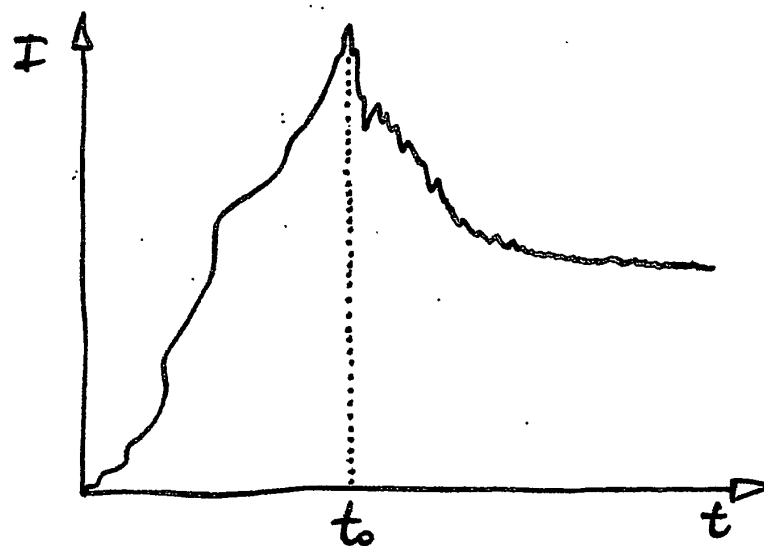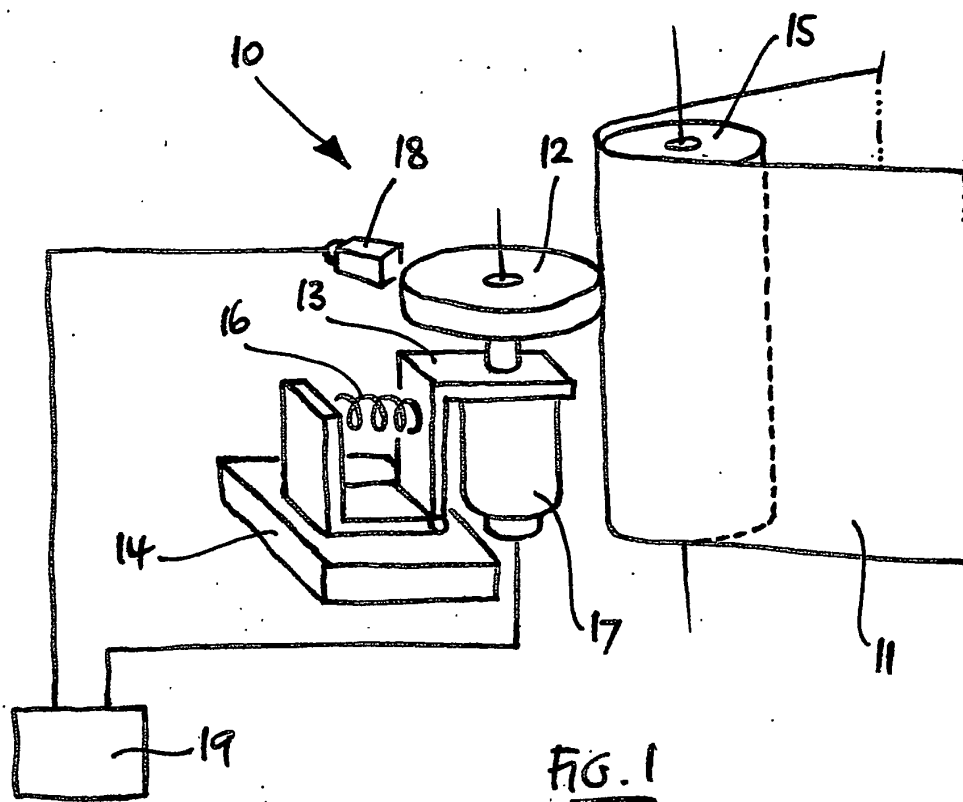

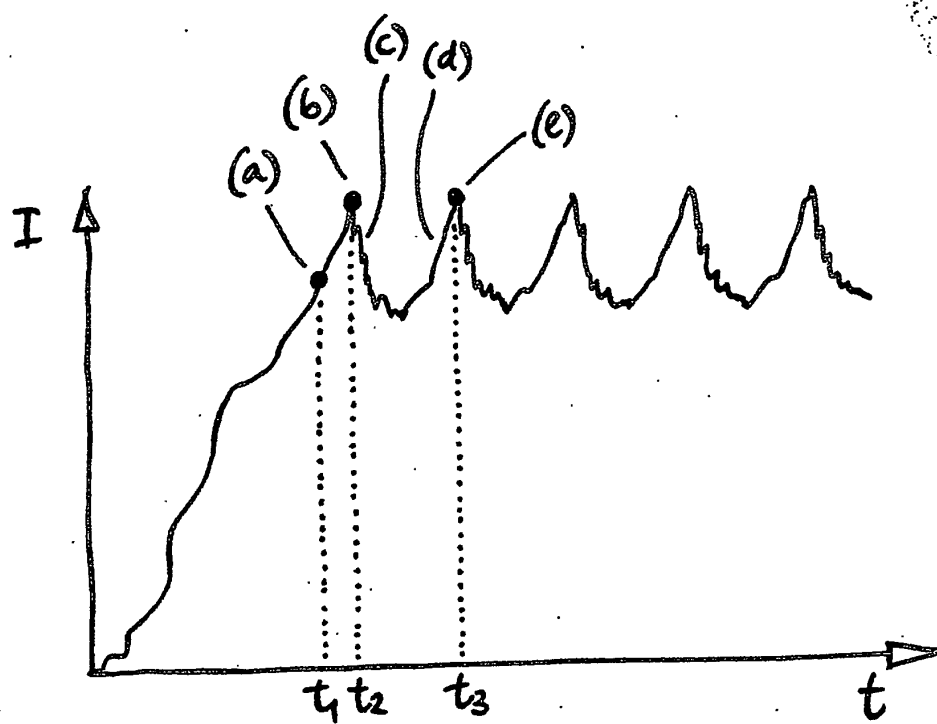FIG.3

PCT Application
GB0305631

